


NORITZ



NOW WITH BUILT-IN RECIRCULATION PUMP
WITH THE QUALITY YOU EXPECT

 **NORITZ**[®]
The Simple Comforts of Life

SPECIFICATIONS

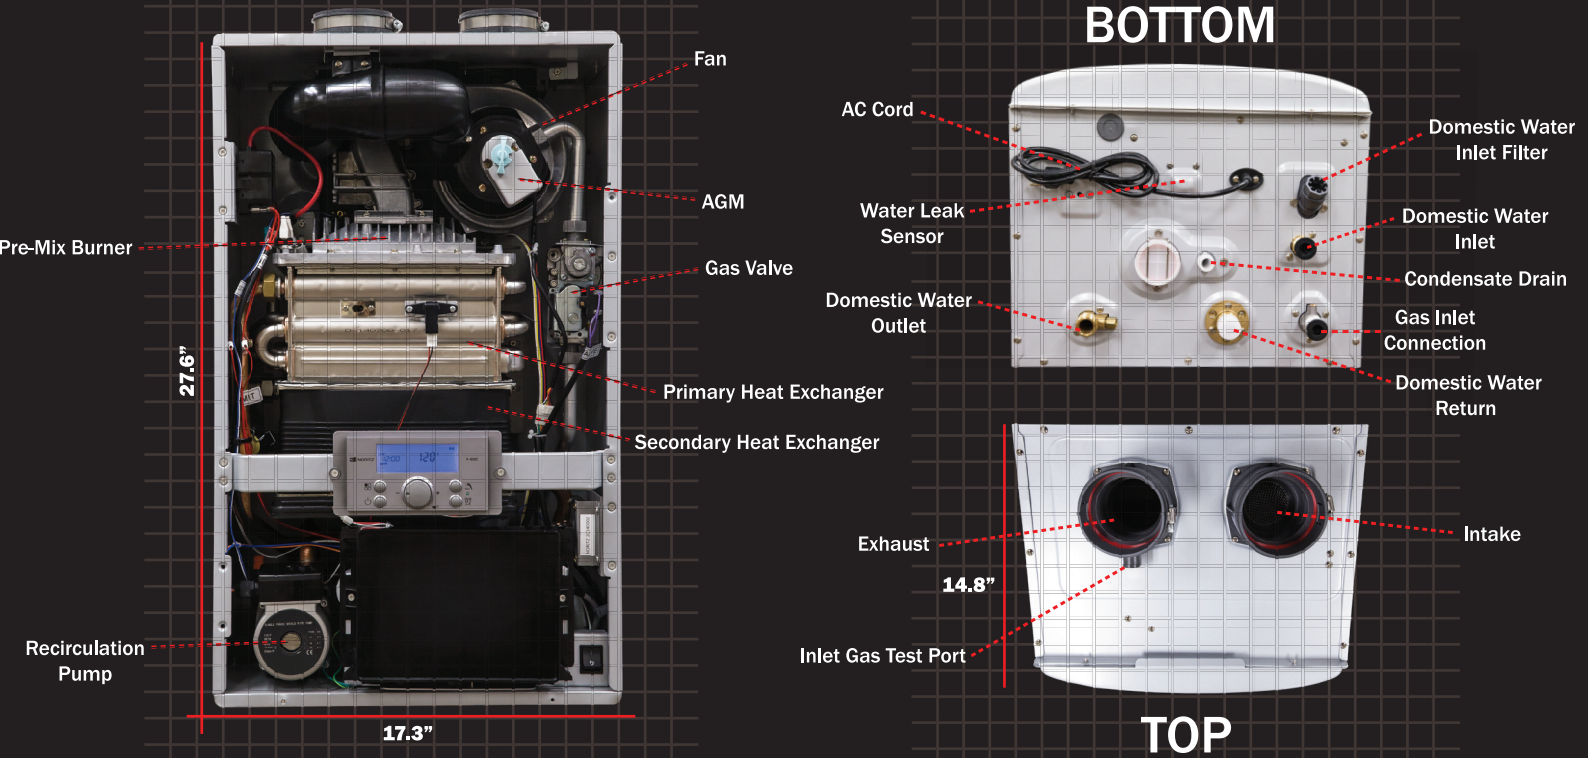

- 2" or 3" PVC, CPVC, PP Venting Options
- Superior Grade Stainless Steel Heat Exchangers
- Gas & Water Leak Detection

- Common Venting Capability
- Customizable Internal & External Recirculation
- *97% Energy Efficiency

Model Name	NRCP982-DV	NRCP1112-DV
BTU Input Range	18,000 - 180,000	18,000 - 199,900
Max Flow Rate	9.8 GPM	11.1 GPM
Flow Rate at $\Delta T =$	35 °F	9.8 GPM
	45 °F	7.6 GPM
	80 °F	4.3 GPM
Vent Line	2" PVC, CPVC, PP	Up to 50 FT.
	3" PVC, CPVC, PP	Up to 100 FT.
Venting - SV Conversion	CONVERSION KIT REQUIRED	
Weight	85 LBS.	
Pressure Drop	15 PSI @ 6 GPM	
Gas Supply Pressure	NG: 3.5" - 10.5" LP: 8.0" - 14.0"	
Connection Sizes	Water Inlet	3/4"
	Hot Water Inlet	3/4"
	Gas Inlet	3/4"
	Condensing Drain	1/2"
Max External Recirculation Loop	1/2" LINE	200 FT.
	3/4" LINE	500 FT.
Energy Factor	.95 EF*	
Warranty	12 YRS. HEAT EXCHANGER, 5 YRS. PARTS, 1 YR. LABOR	
Temperature Settings	100 - 140 °F (IN 5 °F INTERVALS)	